



Jaquar

BATH + LIGHT



RETAIL LIGHTING
CATALOGUE

Jaquar.

A group on a mission.

1972

Essco commissioned its very first, composite, ultra-modern manufacturing plant

1987

The super success of its advanced flush valve made Jaquar the highest-selling bath fittings brand, and revolutionised the Indian market

2006

Launched the shower enclosure category, offering designing-to-installation services, with standardised quality specifications

2008

Commissions 2nd state-of-the-art manufacturing facility in Rajasthan to increase faucet production capacity to 3 million annually

2010

Opens 3rd integrated manufacturing plant. Adds sanitaryware products to offer complete bathroom solutions. Production capacity scales up to 135,000 sq. m.

1960

Launch of Essco, the first pan-India bath fittings brand with an unheard of 7-year warranty

1986

Launch of the premium bath fittings brand – Jaquar. Aimed at bringing global standards to the Indian market

2001

Launch of Jaquar Orientation Centre, an immersive experience centre, for better product visualisation and education with expert advice. Enjoys pan-India presence today

2007

Opens its 1st large-scale manufacturing facility in Rajasthan with a production capacity of 2 million faucets annually, and in-house testing capabilities

2009

Launches India's first luxury bath brand – Artize

Forays into hot water solutions with a wide range of concepts and products



2013

Jaquar is recognised as India's most trusted bath fittings brand by customers in research conducted by Nielsen

Jaquar represents India as the first Indian bath brand to get showcased at ISH, Frankfurt, the global bath fair

2017

Acquires Euro Ceramic, one of Asia's most advanced sanitaryware plants, in Gujarat. Jaquar's 6th manufacturing unit with a production capacity of 2.5 million pieces annually

Opens the first Jaquar World in Dubai, a branded, global, destination showroom of complete bathroom and lighting solutions. It has presence across the globe today

2020

Adds 7th manufacturing unit, spread over almost 56,000 sq. m. Produces Jaquar's LED lighting products - from professional to consumer LED lighting, with advanced testing and certifying lab

2022

Launch of Atelier by Artize - the luxury bath gallery in Delhi, Mumbai, and Bangalore

2016

Opens Jaquar Group global HQs in Delhi NCR, a USGBC-certified net-positive building spread over 48,000 sq. m. And its 4th manufacturing unit, for wellness products

Acquires JoeyForLife, a South Korean company which becomes its 5th manufacturing unit, offering showering systems and technology

2021

Launch of 8th manufacturing unit - water heater plant with a capacity to produce half a million pieces per year and water heaters of up to 100 litres. Overall group manufacturing facilities scaled to 330,000 sq. m.

2023


The Jaquar Group is a global brand with presence in over 55 countries today. Offers complete bathroom and lighting solutions, produces over 39 million bath fittings, and capacity to produce 25 million lighting products

LED lighting solutions

Jaquar lighting gives you LED lighting solutions – for residential, commercial and outdoor use. Choose for varied budgets without compromising on quality and reliability.

They are designed to complement and co-ordinate the most exclusive interior and exterior lifestyles and decors, from classic to contemporary.

In fact, Jaquar lighting carries forward the legacy of Jaquar Group where the thrust has always been on creating new parameters of design, quality and customer satisfaction.

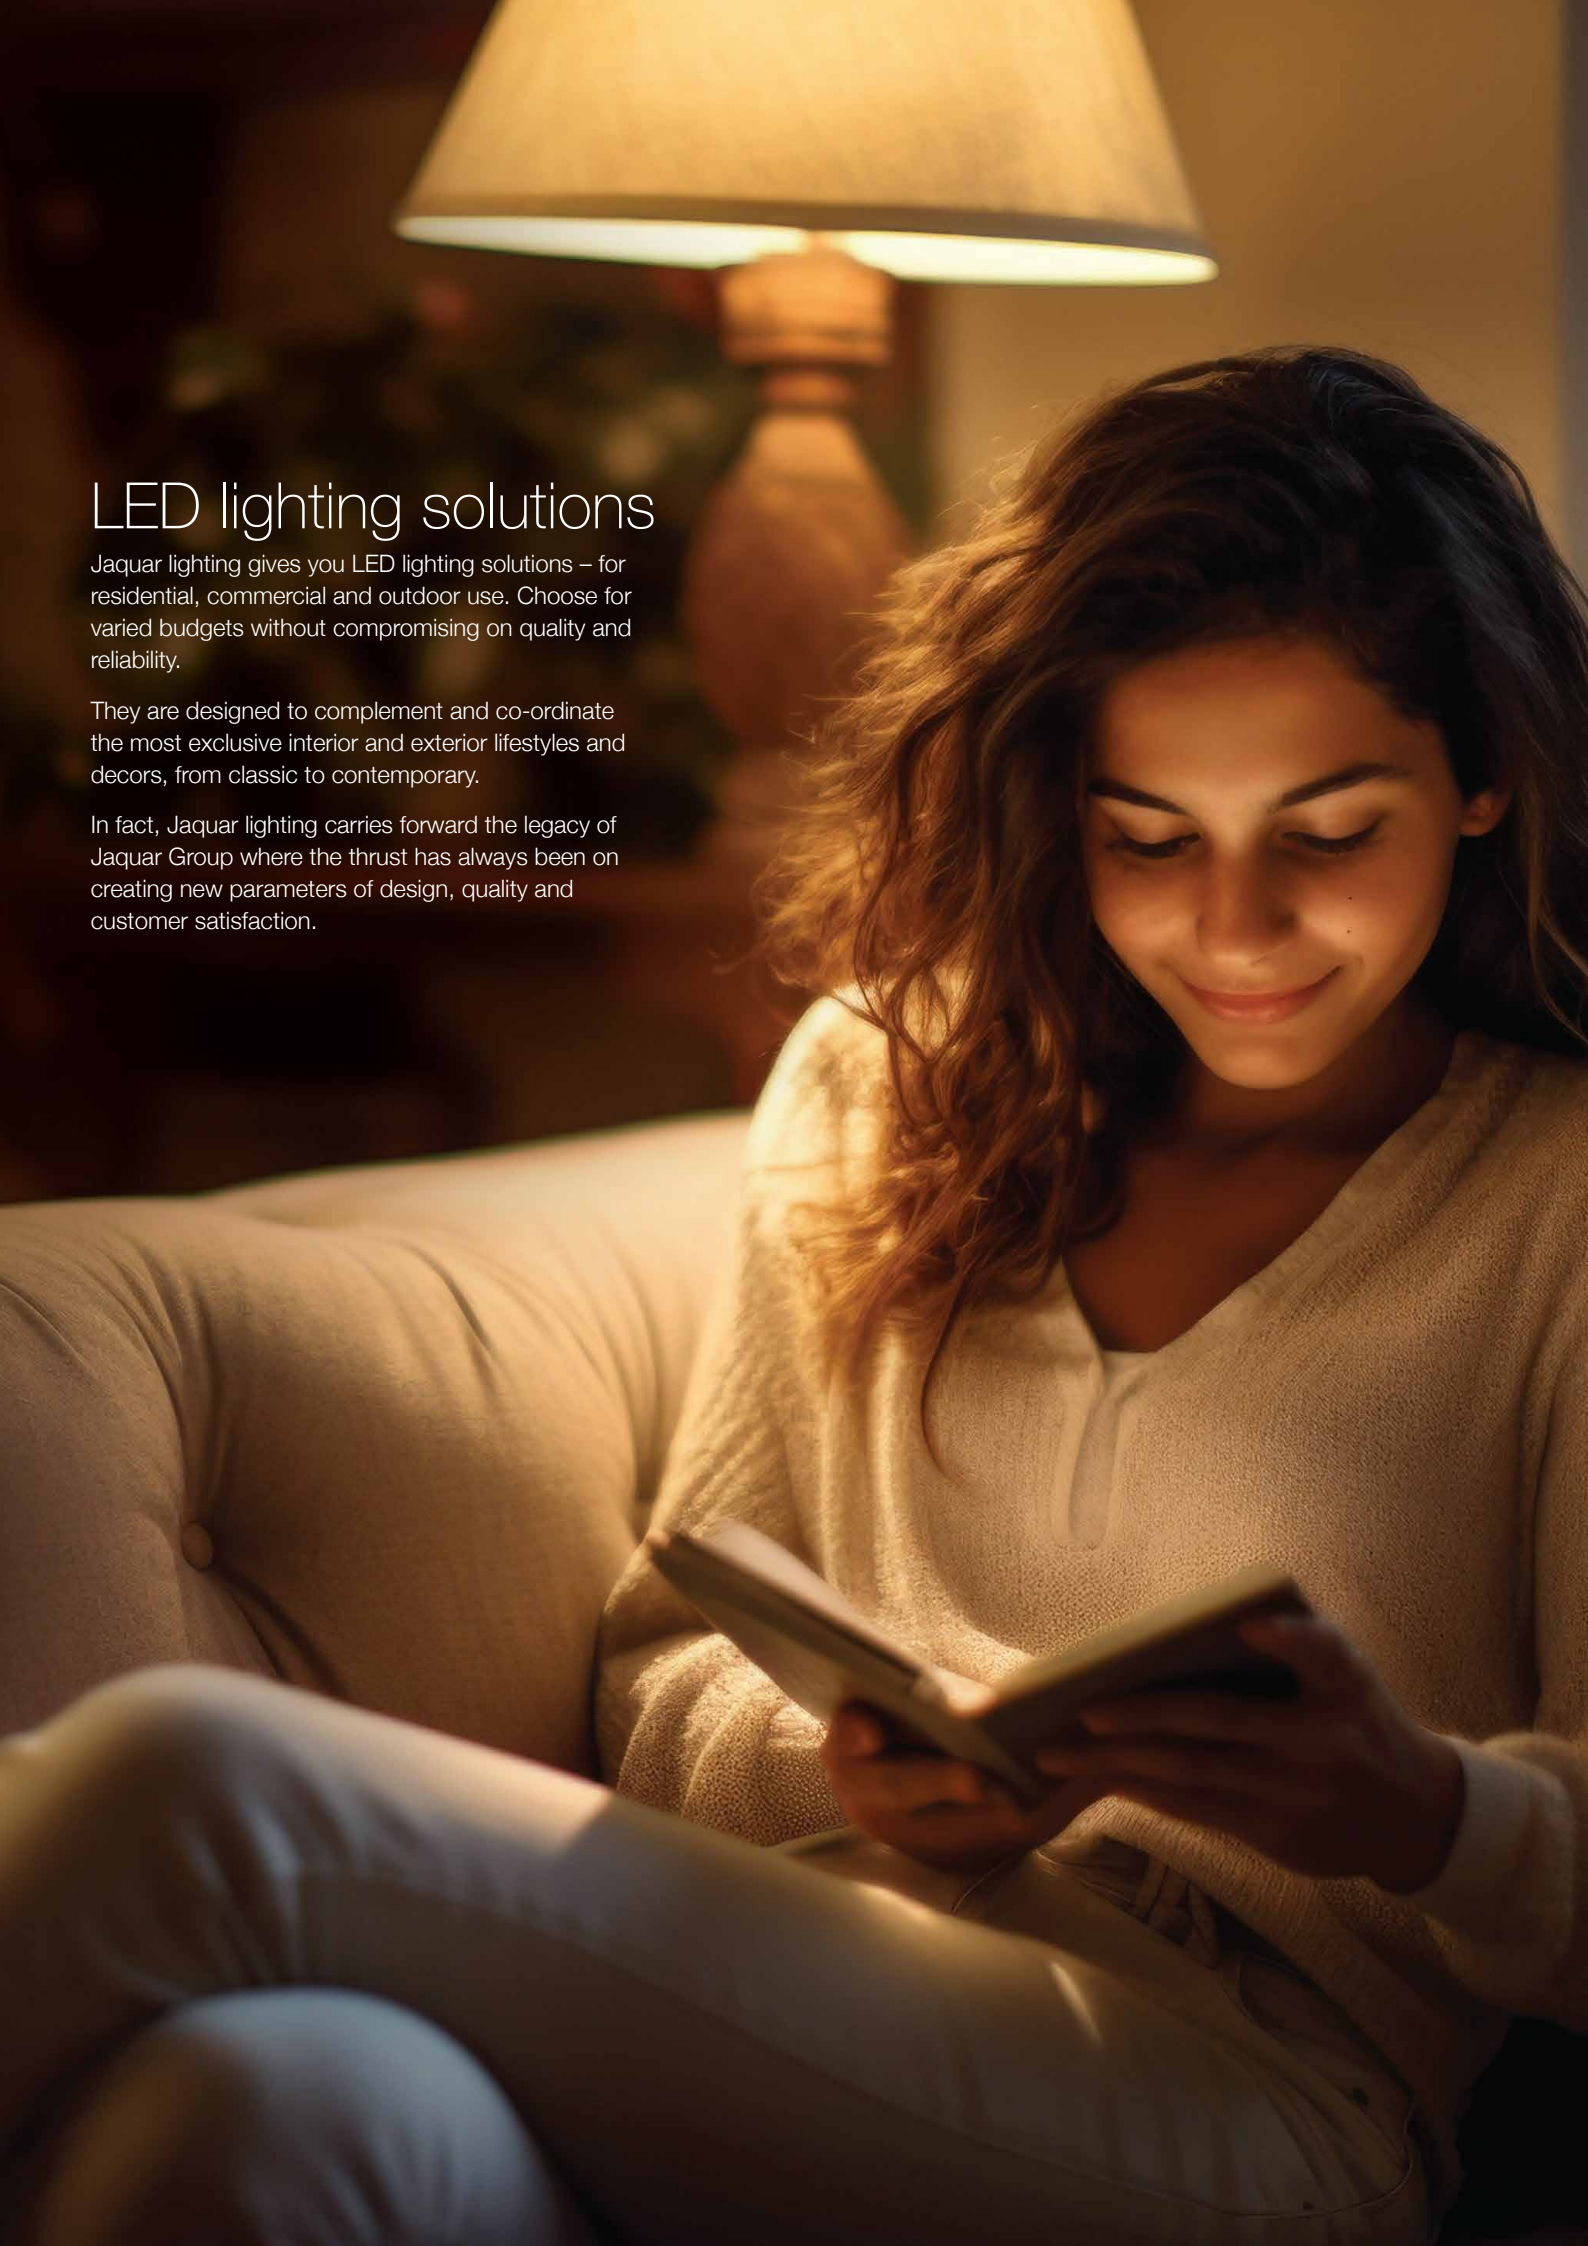

Content



04

Indoor Luminaires

The latest options in LED lighting solutions for indoor spaces in offices, malls, and commercial areas

Outdoor Luminaires

The most comprehensive range of high-quality products for landscape and outdoor lighting



20




28

Consumer Luminaires

Cutting-edge, energy-efficient LED lighting solutions for an array of residential requirements

Smart Luminaires

The world is getting smarter and so are the Jaquar Lighting Products

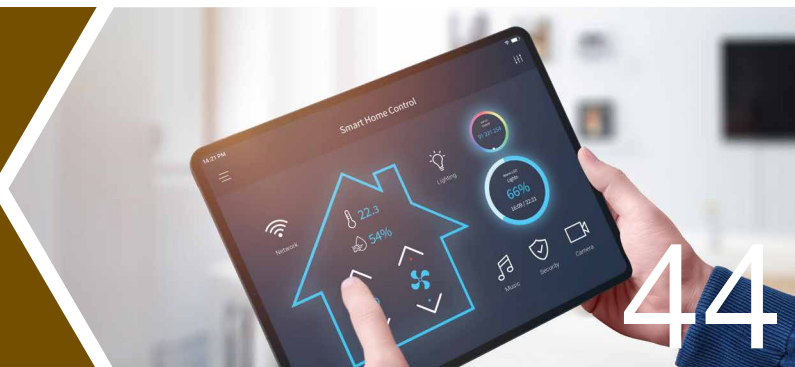

44



Indoor Luminaires


Jaquar's lighting solutions for indoor spaces include a wide range of high quality Downlights, COB Downlights, Battens and Panel lights. The choice makes it easy to find the perfect solution for every décor and lighting need.

- **Downlights**
Choose from as many as 10 different design ranges with sleek profiles, and multiple shapes and specifications.
- **COB Downlights**
Jaquar's recess-mounted COB downlights are available in 3 extensive design ranges with multiple choices of illumination power.
- **Panels**
Available in recess-mounted, surface-mounted or pendant applications, Jaquar's LED panels are first among the equals.
- **Battens and Tubes**
Jaquar offers Battens in 2 designs, a variety of outputs, and 3 different colour temperatures. Also available are a wide range of Tubes.
- **Designer Lights**
Jaquar's stunning offering in its Designer Lighting series brings state-of-the-art lighting solutions for indoor spaces.
- **Retail Lights**
Jaquar offers a complete range of recess-mounted and surface-mounted spotlights, strip lights, and accessories for innovative and attractive indoor spaces.
- **Industrial Lights**
Jaquar offers high-powered, long-lasting tube lights, bulk heads, and COB highbay lights for heavy-duty lighting requirements of industrial plants, factories and shop floors.

INDOOR | Downlights

RECESS-MOUNTED

Square panel with die cast aluminium housing.

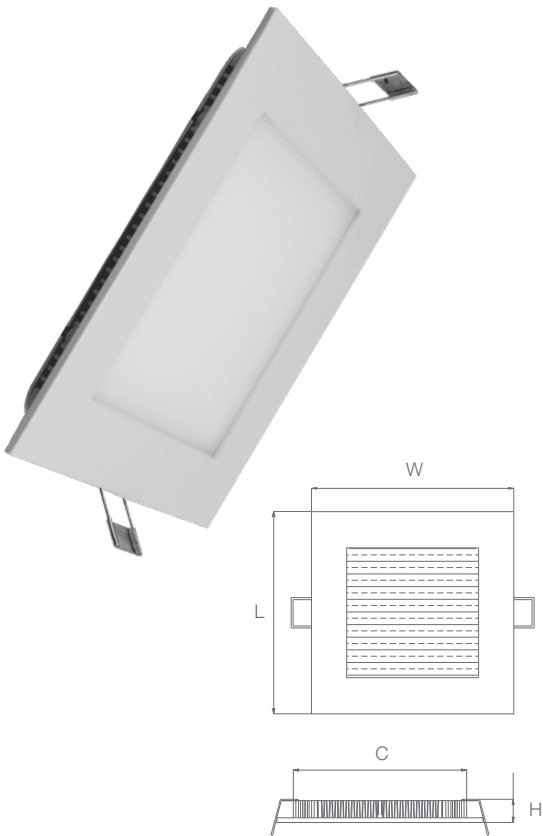

Neve Plus (Square)

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LNEP01S003XC	3	6500	55	515
LNEP01S003XN	3	4000	50	515
LNEP01S003XW	3	3000	45	515
LNEP01S006XC	6	6500	60	615
LNEP01S006XN	6	4000	55	615
LNEP01S006XW	6	3000	50	615
LNEP01S012XC	12	6500	70	870
LNEP01S012XN	12	4000	65	870
LNEP01S012XW	12	3000	60	870
LNEP01S015XC	15	6500	75	970
LNEP01S015XN	15	4000	70	970
LNEP01S015XW	15	3000	65	970
LNEP01S018XC	18	6500	75	1,170
LNEP01S018XN	18	4000	70	1,170
LNEP01S018XW	18	3000	65	1,170
LNEP01S024XC	24	6500	80	1,600
LNEP01S024XN	24	4000	75	1,600
LNEP01S024XW	24	3000	70	1,600

3 W Length: 72 mm | Width: 72 mm | Height: 20 mm

6 W Length: 107 mm | Width: 107 mm | Height: 20 mm

12 W Length: 154 mm | Width: 154 mm | Height: 20 mm


15 W Length: 180 mm | Width: 180 mm | Height: 20 mm

18 W Length: 206 mm | Width: 206 mm | Height: 20 mm

24 W Length: 275 mm | Width: 275 mm | Height: 20 mm

RECESS-MOUNTED

Maintenance-free, round downlight with die cast aluminium housing and sleek backlit design suitable for low height ceiling.

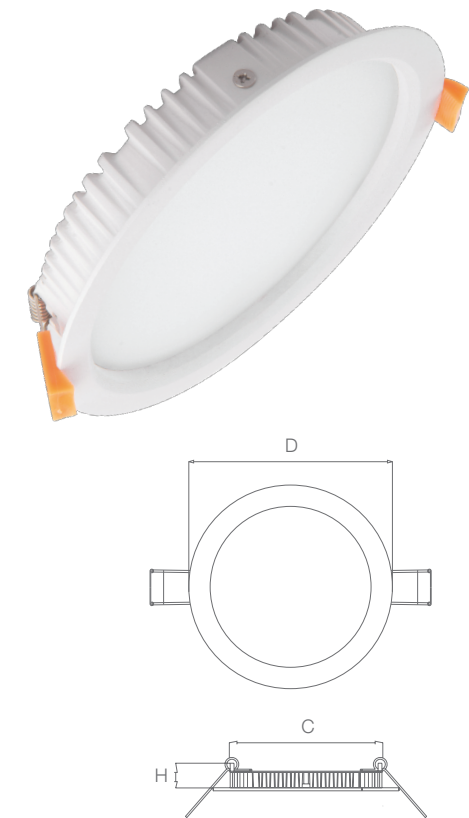

Areva Prime

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LARP01R006XC	6	6500	75	660
LARP01R006XN	6	4000	70	660
LARP01R006XW	6	3000	65	660
LARP01R009XC	9	6500	75	815
LARP01R009XN	9	4000	70	815
LARP01R009XW	9	3000	65	815
LARP01R012XC	12	6500	100	890
LARP01R012XN	12	4000	95	890
LARP01R012XW	12	3000	90	890
LARP01R015XC	15	6500	90	1,080
LARP01R015XN	15	4000	85	1,080
LARP01R015XW	15	3000	80	1,080
LARP01R018XC	18	6500	90	1,240
LARP01R018XN	18	4000	85	1,240
LARP01R018XW	18	3000	80	1,240
LARP01R024XC	24	6500	90	1,690
LARP01R024XN	24	4000	85	1,690
LARP01R024XW	24	3000	80	1,690

6 W Cutout: Ø80 mm | Dimension: Ø90 x 28 mm

9 W Cutout: Ø80 mm | Dimension: Ø90 x 28 mm

12 W Cutout: Ø105 mm | Dimension: Ø120 x 28 mm

15 W Cutout: Ø105 mm | Dimension: Ø120 x 28 mm

18 W Cutout: Ø152 mm | Dimension: Ø171 x 28 mm


24 W Cutout: Ø207 mm | Dimension: Ø225 x 28 mm

*2/3/5 year warranty applicable on all lighting products

INDOOR | Downlight

SURFACE-MOUNTED

Round panel with die cast aluminium housing.

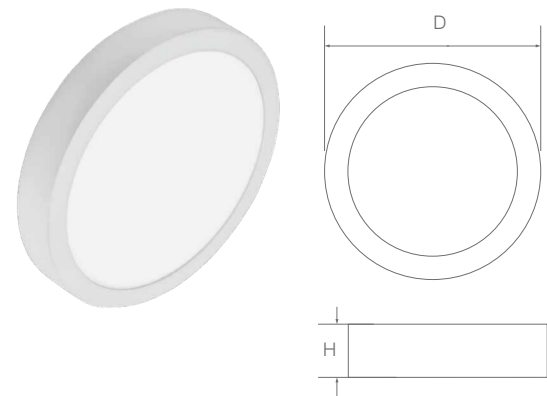

Nero Surface Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LNRO02R006SC	6	6500	65	740
LNRO02R006SN	6	4000	60	740
LNRO02R006SW	6	3000	55	740
LNRO02R012SC	12	6500	75	960
LNRO02R012SN	12	4000	70	960
LNRO02R012SW	12	3000	65	960
LNRO02R018SC	18	6500	75	1,350
LNRO02R018SN	18	4000	70	1,350
LNRO02R018SW	18	3000	70	1,350


6 W Dimension: Ø125 x 35 mm

12 W Dimension: Ø175 x 35 mm

18 W Dimension: Ø225 x 35 mm

SURFACE-MOUNTED

Square panel with die cast aluminium housing.

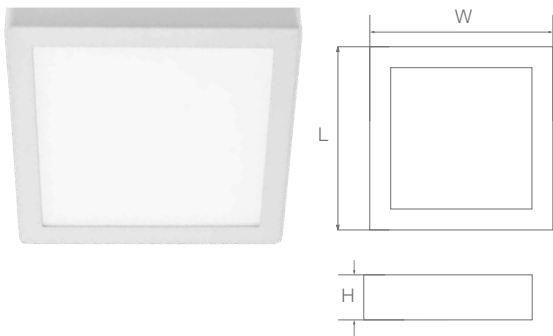

Nero Surface Square

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LNRO02S006SC	6	6500	65	740
LNRO02S006SN	6	4000	60	740
LNRO02S006SW	6	3000	55	740
LNRO02S012SC	12	6500	75	960
LNRO02S012SN	12	4000	70	960
LNRO02S012SW	12	3000	65	960
LNRO02S018SC	18	6500	75	1,350
LNRO02S018SN	18	4000	70	1,350
LNRO02S018SW	18	3000	70	1,350


6 W Dimension: 125 x 125 x 35 mm

12 W Dimension: 175 x 175 x 35 mm

18 W Dimension: 225 x 225 x 35 mm

RECESS-MOUNTED

Round downlight with die cast aluminium housing.

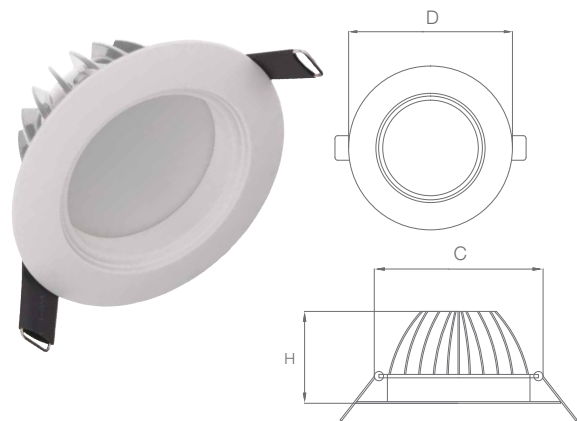

Ensavé Plus

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LESP01R009XC	9	6500	80	1,080
LESP01R009XN	9	4000	75	1,080
LESP01R009XW	9	3000	70	1,080
LESP01R015XC	15	6500	100	1,660
LESP01R015XN	15	4000	95	1,660
LESP01R015XW	15	3000	90	1,660
LESP01R025XC	25	6500	100	2,280
LESP01R025XN	25	4000	95	2,280
LESP01R025XW	25	3000	90	2,280

9 W Cutout: Ø100 mm | Height: 60 mm


15 W Cutout: Ø160 mm | Height: 85 mm

25 W Cutout: Ø160 mm | Height: 85 mm

INDOOR | COB Downlights

RECESS-MOUNTED

COB-based, round, tiltable downlight with die cast aluminium housing and 36° beam angle.

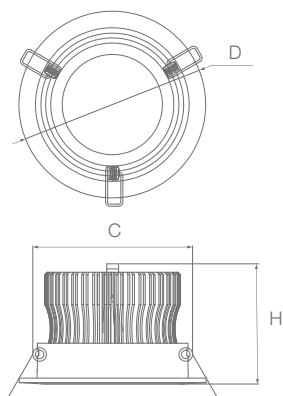

Estus Swivel Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LETS36R003XC	3	6500	80	575
LETS36R003XN	3	4000	75	575
LETS36R003XW	3	3000	70	575
LETS36R006XC	6	6500	95	835
LETS36R006XN	6	4000	90	835
LETS36R006XW	6	3000	85	835
LETS36R009XC	9	6500	90	1,050
LETS36R009XN	9	4000	85	1,050
LETS36R009XW	9	3000	80	1,050
LETS36R012XC	12	6500	95	1,250
LETS36R012XN	12	4000	90	1,250
LETS36R012XW	12	3000	85	1,250
LETS36R015XC	15	6500	95	1,470
LETS36R015XN	15	4000	90	1,470
LETS36R015XW	15	3000	85	1,470
LETS36R018XC	18	6500	95	1,870
LETS36R018XN	18	4000	90	1,870
LETS36R018XW	18	3000	85	1,870
LETS36R024XC	24	6500	100	2,480
LETS36R024XN	24	4000	95	2,480
LETS36R024XW	24	3000	90	2,480
LETS36R030XC	30	6500	100	2,900
LETS36R030XN	30	4000	95	2,900
LETS36R030XW	30	3000	90	2,900

3 W Cutout: Ø58 mm | Dimension: Ø70 x 50 mm

6 W Cutout: Ø74 mm | Dimension: Ø84 x 65 mm

9 W Cutout: Ø74 mm | Dimension: Ø84 x 65 mm

12 W Cutout: Ø95 mm | Dimension: Ø110 x 85 mm


15 W Cutout: Ø95 mm | Dimension: Ø110 x 85 mm

18 W Cutout: Ø118 mm | Dimension: Ø138 x 85 mm

24 W Cutout: Ø118 mm | Dimension: Ø138 x 85 mm

30 W Cutout: Ø118 mm | Dimension: Ø138 x 100 mm

Deep recess-mounted, COB-based, round, fixed downlight with die cast aluminium housing and 24° beam angle.

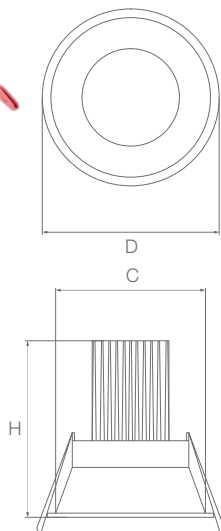

Eris (Low border deep-recessed)

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LERS02R005XC	5	6500	75	1,130
LERS02R005XN	5	4000	70	1,130
LERS02R005XW	5	3000	65	1,130
LERS02R010XC	10	6500	90	1,870
LERS02R010XN	10	4000	85	1,870
LERS02R010XW	10	3000	80	1,870
LERS02R015XC	15	6500	105	2,130
LERS02R015XN	15	4000	100	2,130
LERS02R015XW	15	3000	95	2,130
LERS02R020XC	20	6500	100	2,720
LERS02R020XN	20	4000	99	2,720
LERS02R020XW	20	3000	88	2,720

5 W Cutout: Ø47 mm | Height: 100 mm

10 W Cutout: Ø69 mm | Height: 110 mm

15 W Cutout: Ø80 mm | Height: 120 mm

20 W Cutout: Ø115 mm | Height: 130 mm

*THD <10%, *CRI >90

*Also available in black housing in 10 & 15 W

*2/3/5 year warranty applicable on all lighting products

INDOOR | COB Downlights

Deep recess-mounted, COB-based swivel downlight with 38° beam angle.



Eris Swivel Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LERS03R007XC	7	6500	80	1,280
LERS03R007XN	7	4000	75	1,280
LERS03R007XW	7	3000	70	1,280
LERS03R012XC	12	6500	80	1,760
LERS03R012XN	12	4000	75	1,760
LERS03R012XW	12	3000	70	1,760
LERS03R020XC	20	6500	105	2,370
LERS03R020XN	20	4000	100	2,370
LERS03R020XW	20	3000	95	2,370
LERS03R030XC	30	6500	95	3,260
LERS03R030XN	30	4000	90	3,260
LERS03R030XW	30	3000	85	3,260

7 W Cutout: Ø78 mm | Height: 73 mm

12 W Cutout: Ø92 mm | Height: 90 mm

20 W Cutout: Ø117 mm | Height: 90 mm

30 W Cutout: Ø148 mm | Height: 98 mm

*THD <10%, *CRI >90

*Also available in black housing

RECESS-MOUNTED

COB-based downlight with die cast aluminium housing and anodized reflector.



Eris Reflecto

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LERS04R007XC	7	6500	75	1,530
LERS04R007XN	7	4000	70	1,530
LERS04R007XW	7	3000	70	1,530
LERS04R012XC	12	6500	80	2,190
LERS04R012XN	12	4000	75	2,190
LERS04R012XW	12	3000	75	2,190
LERS04R020XC	20	6500	80	3,030
LERS04R020XN	20	4000	75	3,030
LERS04R020XW	20	3000	75	3,030
LERS04R030XC	30	6500	80	3,960
LERS04R030XN	30	4000	75	3,960
LERS04R030XW	30	3000	75	3,960

7 W Cutout: Ø75 mm | Height: 43 mm | Beam angle: 38°

12 W Cutout: Ø97 mm | Height: 53 mm | Beam angle: 43°

20 W Cutout: Ø115 mm | Height: 65 mm | Beam angle: 52°

30 W Cutout: Ø140 mm | Height: 75 mm | Beam angle: 52°

INDOOR | COB Downlights

RECESS-MOUNTED

Recess-mounted, COB-based downlight with die cast aluminium housing and clear glass.



Eris Fixed

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LERS05R007XC	7	6500	85	1,290
LERS05R007XN	7	4000	80	1,290
LERS05R007XW	7	3000	75	1,290
LERS05R012XC	12	6500	85	1,840
LERS05R012XN	12	4000	80	1,840
LERS05R012XW	12	3000	75	1,840
LERS05R020XC	20	6500	105	2,870
LERS05R020XN	20	4000	100	2,870
LERS05R020XW	20	3000	95	2,870
LERS05R035XC	35	6500	100	4,330
LERS05R035XN	35	4000	95	4,330
LERS05R035XW	35	3000	90	4,330

7 W Cutout: Ø80 mm | Height: 60 mm | Beam angle: 33°
12 W Cutout: Ø100 mm | Height: 65 mm | Beam angle: 45°
20 W Cutout: Ø130 mm | Height: 75 mm | Beam angle: 45°
35 W Cutout: Ø185 mm | Height: 95 mm | Beam angle: 50°

INDOOR | Designer Lights

Decorative, energy-efficient, recess-mounted 2x2 decorative panel with white powder coated CRCA housing and full mounted acrylic diffuser, flicker-free low power consumption bulb.



Scintillio Slim

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LSNL01S045XC	45	6500	100	2,830
LSNL01S045XN	45	4000	95	2,830
LSNL01S045XW	45	3000	90	2,830

45 W Length: 580 mm | Width: 580 mm | Height: 20 mm

*THD <10%

Recess-mounted zoom light with powder coated die cast aluminium housing and anodized aluminium reflector. 38° beam angle.




Zoom Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LZOM01R015XC	15	6500	85	2,290
LZOM01R015XN	15	4000	80	2,290
LZOM01R015XW	15	3000	75	2,290
LZOM01R025XC	25	6500	85	4,260
LZOM01R025XN	25	4000	80	4,260
LZOM01R025XW	25	3000	75	4,260

15 W Cutout: Ø85 mm | Height: 72 mm
25 W Cutout: Ø140 mm | Height: 121 mm
CRI >90
*THD <10%

RECESS-MOUNTED

COB based multiple zoom light with die cast aluminium housing, anodized reflector and tempered transparent glass diffuser. 40° beam angle.

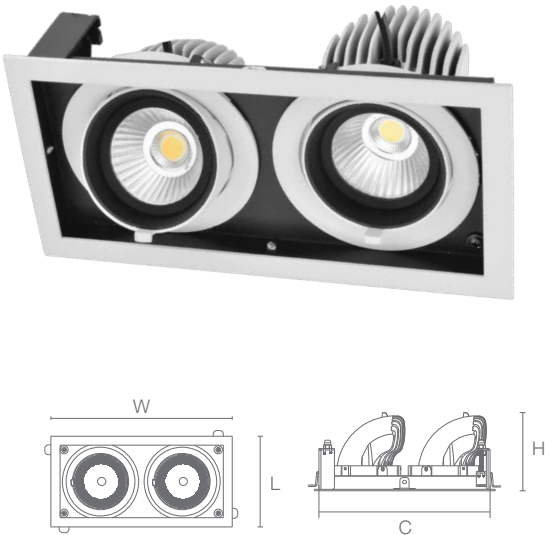

Multiple Zoom Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LZOMMLR215XC	2x15	6500	85	5,925
LZOMMLR215XN	2x15	4000	80	5,925
LZOMMLR215XW	2x15	3000	75	5,925

2 x 15 W Length: 192 mm | Width: 92 mm | Height: 86 mm

Track-mounted round focus light with moveable base. Fully adjustable with aluminium housing (including driver casing). 40° beam angle.

Track Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LTRLW1R010XC	10	5000	85	3,140
LTRLW1R010XN	10	4000	80	3,140
LTRLW1R010XW	10	3000	75	3,140
LTRLW1R020XC	20	5000	85	5,725
LTRLW1R020XN	20	4000	80	5,725
LTRLW1R020XW	20	3000	75	5,725
LTRLW1R030XC	30	5000	85	7,000
LTRLW1R030XN	30	4000	80	7,000
LTRLW1R030XW	30	3000	75	7,000

LTRLB1R010XC	10	5000	85	3,140
LTRLB1R010XN	10	4000	80	3,140
LTRLB1R010XW	10	3000	75	3,140
LTRLB1R020XC	20	5000	85	5,725
LTRLB1R020XN	20	4000	80	5,725
LTRLB1R020XW	20	3000	75	5,725
LTRLB1R030XC	30	5000	85	7,000
LTRLB1R030XN	30	4000	80	7,000
LTRLB1R030XW	30	3000	75	7,000

10 W Dia: Ø78 mm | Length: 205 mm | Width: 192 mm | Height: 106 mm

20 W Dia: Ø110 mm | Length: 268 mm | Width: 240 mm | Height: 131 mm

30 W Dia: Ø110 mm | Length: 268 mm | Width: 240 mm | Height: 131 mm

Accessories for Track Light

3 Line Track

Item Code	Length	Colour	MRP
LTRK3L1MTRBL	1 Meter	Black	1,210
LTRK3L1MTRWH	1 Meter	White	1,210
LTRK3L2MTRBL	2 Meter	Black	2,290
LTRK3L2MTRWH	2 Meter	White	2,290


3 Line Track Connector

Item Code	Shape	Colour	MRP
LTRCBL3LISHP	I	Black	300
LTRCWH3LISHP	I	White	300
LTRCBL3LLSHP	L	Black	420
LTRCWH3LLSHP	L	White	420
LTRCBL3LXSHP	X	Black	920
LTRCWH3LXSHP	X	White	920
LTRCBL3LTSHP	T	Black	605
LTRCWH3LTSHP	T	White	605

INDOOR | Retail Lights

DEEP RECESSED

Surface mounted focus light with die cast aluminium housing.

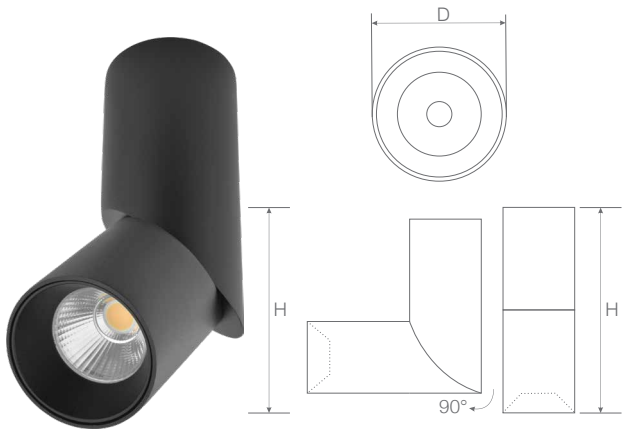


Cyno

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LCYN01R010SC	10	6500	80	2,480
LCYN01R010SN	10	4000	75	2,480
LCYN01R010SW	10	3000	70	2,480

10 W Dia: Ø50 mm | Height: 176 mm

DEEP RECESSED

Extended COB focus light with die cast aluminium housing.

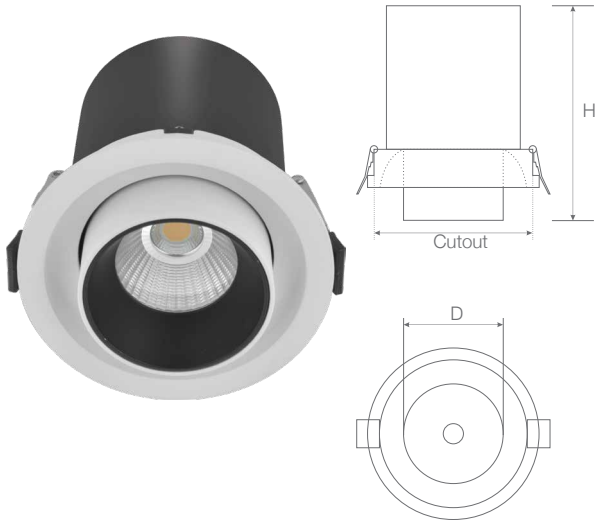

Empha

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LEMP01R007XC	7	6500	80	2,210
LEMP01R007XN	7	4000	75	2,210
LEMP01R007XW	7	3000	70	2,210
LEMP01R015XC	15	6500	80	2,420
LEMP01R015XN	15	4000	75	2,420
LEMP01R015XW	15	3000	70	2,420

7 W Cutout: Ø62 mm | Dia: Ø72 mm | Height: 98 mm

15 W Cutout: Ø90 mm | Dia: Ø103 mm | Height: 99 mm

DEEP RECESSED

Downlight with die cast aluminium housing.



Emina

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LEMA01R008XC	8	6500	80	1,390
LEMA01R008XN	8	4000	75	1,390
LEMA01R008XW	8	3000	70	1,390
LEMA01R015XC	15	6500	80	1,660
LEMA01R015XN	15	4000	75	1,660
LEMA01R015XW	15	3000	70	1,660

8 W Cutout: Ø55 mm | Dia: Ø65 mm | Height: 65 mm

15 W Cutout: Ø75 mm | Dia: Ø85 mm | Height: 80 mm

*CRI >90, THD <10% | *Also available in black housing

INDOOR | Retail Lights

DEEP RECESSED

Downlight with die cast aluminium housing.



Emina Tilttable

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LEMAT1R008XC	8	6500	80	1,590
LEMAT1R008XN	8	4000	75	1,590
LEMAT1R008XW	8	3000	70	1,590
LEMAT1R015XC	15	6500	80	1,990
LEMAT1R015XN	15	4000	75	1,990
LEMAT1R015XW	15	3000	70	1,990


8 W Cutout: Ø65 mm | Dia: Ø78 mm | Height: 65 mm

15 W Cutout: Ø85 mm | Dia: Ø98 mm | Height: 80 mm

*CRI >90, THD <10%

RECESS-MOUNTED

COB based tilttable linear spot light with die cast aluminium housing and 30° beam angle.

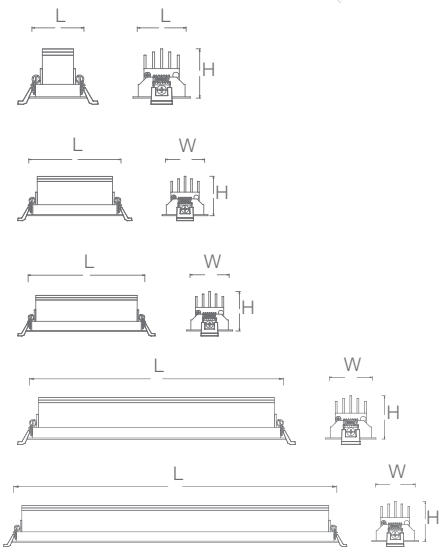

Rene

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LRNE01S002XC	2	6500	70	1,110
LRNE01S002XN	2	4000	65	1,110
LRNE01S002XW	2	3000	60	1,110
LRNE01S006XC	6	6500	100	1,630
LRNE01S006XN	6	4000	95	1,630
LRNE01S006XW	6	3000	90	1,630
LRNE01S010XC	10	6500	100	2,370
LRNE01S010XN	10	4000	95	2,370
LRNE01S010XW	10	3000	90	2,370
LRNE01S020XC	20	6500	100	3,980
LRNE01S020XN	20	4000	95	3,980
LRNE01S020XW	20	3000	90	3,980
LRNE01S030XC	30	6500	100	5,225
LRNE01S030XN	30	4000	95	5,225
LRNE01S030XW	30	3000	90	5,225

2 W Cutout: Ø50 x 47 mm | Length: 55 mm | Width: 55 mm | Height: 47mm

6 W Cutout: Ø111 x 47 mm | Length: 116 mm | Width: 55 mm | Height: 47 mm

10 W Cutout: Ø153 x 47 mm | Length: 158 mm | Width: 55 mm | Height: 47 mm

20 W Cutout: Ø286 x 47 mm | Length: 290 mm | Width: 55 mm | Height: 47 mm

30 W Cutout: Ø419 x 47 mm | Length: 423 mm | Width: 55 mm | Height: 47 mm

*Also available in black housing

INDOOR | Retail Lights

This strip light is suitable for indoor applications with different colours and wattages. Standard 5.0 meter roll.




IP20 Strip Light (24 V DC)

Item Code	Wattage (W)	CCT (K)	MRP
LSTP03X005XC	25	6000	1,190
LSTP03X005XN	25	4000	1,190
LSTP03X005XW	25	3000	1,190
LSTP03X008XC	40	6000	1,840
LSTP03X008XW	40	3000	1,840
LSTP03X015XC	75	6000	2,400
LSTP03X015XW	75	3000	2,400

25 W Width: 8 mm | Height: 2.5 mm
40 W Width: 8 mm | Height: 2.5 mm
75 W Width: 8 mm | Height: 2.5 mm



This strip light is suitable for outdoor applications with different colours and wattages. Standard 5.0 meter roll.

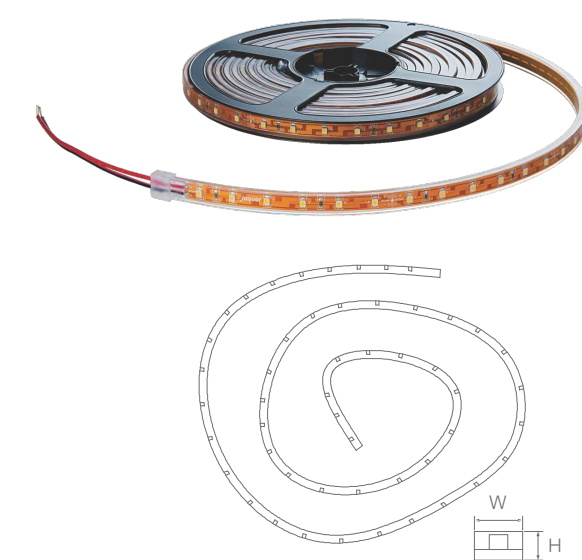

IP65 Strip Light (24 V DC)


Item Code	Wattage (W)	CCT (K)	MRP
LSTP04X005XC	25	6000	1,790
LSTP04X005XW	25	3000	1,790
LSTP04X008XC	40	6000	3,740
LSTP04X008XW	40	3000	3,740
LSTP04X015XC	75	6000	3,130
LSTP04X015XW	75	3000	3,130

25 W Width: 10 mm | Height: 4.5 mm
40 W Width: 10 mm | Height: 4.5 mm
75 W Width: 10 mm | Height: 4.5 mm

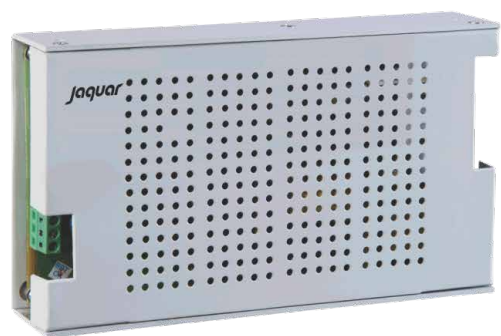

Power Supply for Indoor
Strip Light (IP20)

Item Code	Wattage (W)	MRP
LDRV01S030XX	30	675
LDRV01S048XX	48	1,040
LDRV01S060XX	60	1,210
LDRV01S072XX	72	1,380
LDRV01S096XX	96	2,800

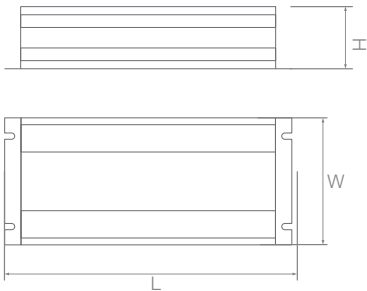

Power Supply for Outdoor
Strip Light (IP65 rated)

Item Code	Wattage (W)	MRP
LDRV02S030XX	30	1,310
LDRV02S048XX	48	1,840
LDRV02S060XX	60	2,470
LDRV02S072XX	72	2,570
LDRV02S096XX	96	3,480

INDOOR | Panels

RECESS-MOUNTED

1'x1' panel with white powder coated CRCA housing and full mounted acrylic diffuser.



Ultima Slim (1'x1')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LULTSLS018XC	18	6500	100	1,400
LULTSLS018XN	18	5000	95	1,400
LULTSLS018XW	18	4000	90	1,400

18 W Length: 294 mm | Width: 294 mm | Height: 35 mm | Beam angle: 120°

THD <15%, CRI >80,

RECESS-MOUNTED

1'x4' panel with white powder coated CRCA housing and full mounted acrylic diffuser.



Ultima Ultra Slim (1'x4')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LULU4SL033XC	33	6500	120	3,630
LULU4SL033XN	33	4000	115	3,630
LULU4SL033XW	33	3000	105	3,630

33 W Length:1200 | Width: 300 mm | Height: 35 mm

High efficacy, recess-mounted panel with white powder coated CRCA housing and full mounted acrylic diffuser (2'x2'), 120 Lm / W for 36 W and 120 Lm / W for 24 W.



Ultima Ultra (2'x2')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LULTSLS024XC	24	6500	120	2,350
LULU2SL036XC	36	6500	120	2,990

24 & 36 W Length: 595 mm | Width: 595 mm | Height: 35 mm

INDOOR | Panels

Multi-colour changeable recess-mounted panel with white powder coated CRCA housing and full mounted acrylic diffuser (2'x2').



Ultima Multi-colour (2'x2')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LULTSLA032XM	32	6500/4000/3000	100	6,425
ULTSLAREMOTE*	-	-	-	1,090

32 W Length: 595 mm | Width: 595 mm | Height: 35 mm

THD <10%, CRI >80

Colour changes through switching

*Remote

INDOOR | Industrial Lights

Corrosion and impact resistant batten with polycarbonate housing. Dust and water-proof.



Pride (Weather-proof IP65 rated)


Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LPRD01X020XC	20	6000	100	2,290
LPRD01X020XW	20	3000	90	2,290
LPRD01X040XC	40	6000	100	3,220
LPRD01X040XW	40	3000	90	3,220
LPRD01S040XC*	40	6500	100	4,150

20 W Length: 590 mm | Width: 86 mm | Height: 67 mm

40 W Length: 1180 mm | Width: 86 mm | Height: 67 mm

*With motion sensor

Bulk head with pressure die cast aluminium housing and acrylic diffuser (IP65 protection).

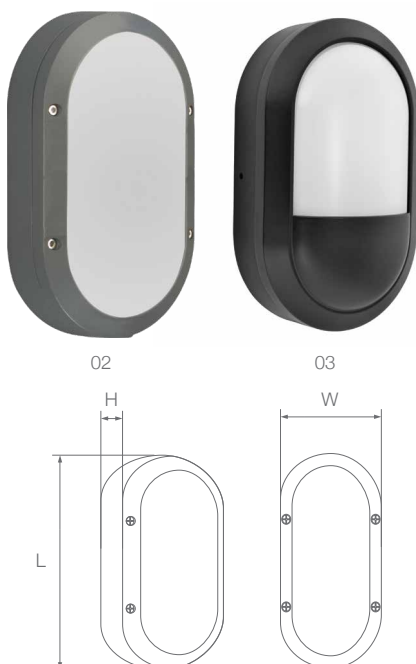

Bulk Head

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LBLK02X010XC	10	6000	90	1,330
LBLK02X010XN	10	4000	85	1,330
LBLK02X010XW	10	3000	80	1,330
LBLK03X010XC	10	6000	90	1,450
LBLK03X010XN	10	4000	80	1,450
LBLK03X010XW	10	3000	80	1,450

10 W Length: 216 mm | Width: 132 mm | Height: 58 mm

CRI >80

*2/3/5 year warranty applicable on all lighting products






Outdoor Luminaires

Reducing energy consumption and increasing road safety can now go hand-in-hand with outdoor lighting solutions from Jaquar. Choose from a wide range of durable and weather-resistant street light and flood light options in a choice of outputs to suit every road's requirement.

OUTDOOR | Roadway Lights

IP66 RATED

Street light with pressure die cast aluminium housing, glass cover and lens**.

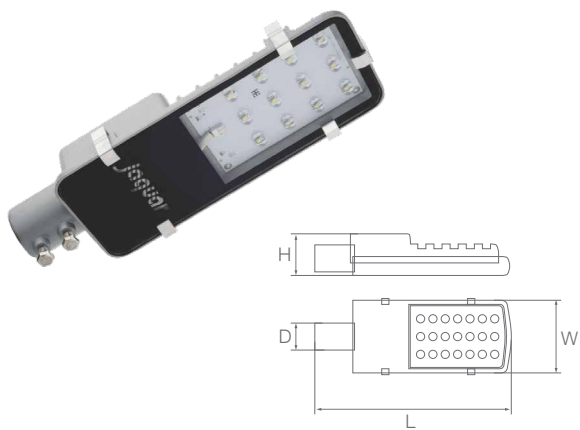

PCR

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LPCRSRT25WLC	25	5700	100	3,200
LPCRSRT30WXC	30	5700	90	3,600
LPCRSRT36WXC	36	5700	110	4,200

25, 30 & 36 W Mounting dia: Ø 42 mm
Length: 330 mm
Width: 117 mm
Height: 67 mm
**T&C apply

IP66 RATED

Street light with pressure die cast aluminium housing and polycarbonate cover.



Trump

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LTRUMP0025XC	25	5700	100	3,100
LTRUMP0025XW	25	3000	90	3,100
LTRUMP0030XC	30	5700	100	3,600
LTRUMP0030XW	30	3000	90	3,600

25 & 30 W Mounting dia: Ø 41 mm | Length: 365 mm | Width: 105 mm | Height: 75 mm

LED street light with pressure die cast aluminium housing with toughened glass cover.



Street Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
LSRT015045XC	45	5700	100	5,500

45 W Mounting dia: Ø44 mm | Length: 330 mm | Width:117 mm | Height: 67 mm
*THD <10%, CRI >70

OUTDOOR | Roadway Lights

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and polycarbonate cover.



Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
LSRT04S025XC	25	5700	10	3,250
LSRT04S025XW	25	3000	10	3,250
LSRTTOS025XC*	25	5700	10	3,350
LSRT015030XC	30	5700	10	3,700
LSRT015030XW	30	3000	10	3,700
LSRTTOS030XC*	30	5700	10	3,800

25 & 30 W Mounting dia: Ø26 mm | Length: 180 mm | Width: 115 mm | Height: 60 mm

*System lumen efficacy 120 Lm / W

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
LSRTTOS045XC*	45	5700	1	7,000
LSRT015060XC	60	5700	1	7,000
LSRT015060XW	60	3000	1	7,000
LSRTTOS060XC*	60	5700	1	8,100
LSRT015070XC	70	5700	1	8,200
LSRT015070XW	70	3000	1	8,200
LSRTTOS072XC*	72	5700	1	11,000

45, 60, 70 & 72 W Mounting dia: Ø53 mm

Length: 320 mm | Width: 190 mm | Height: 80 mm

*System lumen efficacy 120 Lm / W

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
LSRT015090XC	90	5700	1	10,000
LSRT015090XW	90	3000	1	10,000
LSRTTOS090XC*	90	5700	1	14,000
LSRT015120XC	120	5700	1	14,500
LSRT015120XW	120	3000	1	14,500
LSRTTOS120XC*	120	5700	1	18,000

90 & 120 W Mounting dia: Ø62 mm

Length: 400 mm | Width: 200 mm | Height: 108 mm

*System lumen efficacy 120 Lm / W

OUTDOOR | Roadway Lights

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



With external SPD 10KV*


Faro (Low wattage floodlight)

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
LFRO01S030XC	30	5700	1	2,210
LFRO01S050XC	50	5700	1	2,980

30 W Length: 198 mm | Width: 188 mm | Height: 36 mm

50 W Length: 238 mm | Width: 228 mm | Height: 36 mm

*Efficacy is ≥100 Lm / W

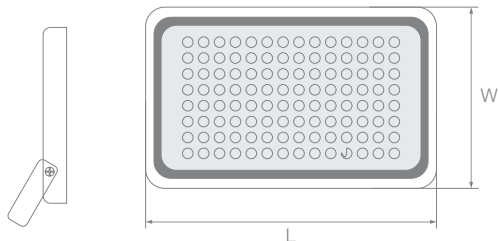

IP66 rated floodlight with high pressure die cast aluminium housing, lens and toughened glass cover offering lumen intensity >110 Lm / W.



Efficacy >110 Lm / W
With external SPD 10KV

Ledstar

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
LFLDLSL070XC	70	5700	1	9,450
LFLDLSL070XW	70	3000	1	9,450
LFLDLSL100XC	100	5700	1	10,750
LFLDLSL100XW	100	3000	1	10,750
LFLDLSL120XC	120	5700	1	12,500
LFLDLSL120XW	120	3000	1	12,500
LFLDLSL150XC	150	5700	1	15,600
LFLDLSL150XW	150	3000	1	15,600
LFLDLSL180XC	180	5700	1	19,500
LFLDLSL180XW	180	3000	1	19,500
LFLDLSL200XC	200	5700	1	20,000
LFLDLSL200XW	200	3000	1	20,000
LFLDLSL240XC	240	5700	1	25,500
LFLDLSL240XW	240	3000	1	25,500
LFLDLSL300XC	300	5700	1	33,000
LFLDLSL300XW	300	3000	1	33,000
LFLDLSL350XC	350	5700	1	42,800

70 W Length: 230 mm | Width: 195 mm | Height: 53 mm

100 & 120 W Length: 290 mm | Width: 240 mm | Height: 60 mm

150 W Length: 360 mm | Width: 295 mm | Height: 74 mm

180 & 200 W Length: 387 mm | Width: 287 mm | Height: 50 mm

240 W Length: 332 mm | Width: 245 mm | Height: 120 mm

300 W Length: 383 mm | Width: 295 mm | Height: 125 mm

350 W Length: 485 mm | Width: 350 mm | Height: 135 mm

Cone Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65



Product Code

LBLDCON010XW

Wattage

10 W LED

MRP: 4,750

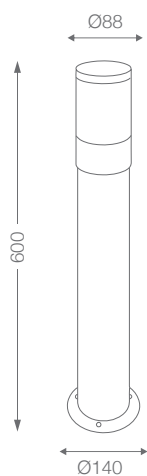

Cylinder Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65

Product Code

LBLDCYL010XW

Wattage

10 W LED

MRP: 4,750

Disc Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65


Product Code

LBLDDSC010XW

Wattage

10 W LED

MRP: 5,475

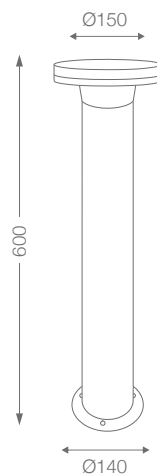

Orbarix

Features

Die cast aluminium housing
Tempered glass diffuser
Matt grey finish
90 V - 260 V AC
Warm white
IP54

Product Code

LBLD02R108XW

Wattage

8 W COB LED

MRP: 9,150

Foot Light

Features

Die cast aluminium housing
Polycarbonate diffuser
White and grey finish
150 V - 300 V AC
IP54

Product Code



LFTL01S003XW*
LFTLW1S003XW#

Wattage

3 W LED

*Grey housing | #White housing

MRP: 910

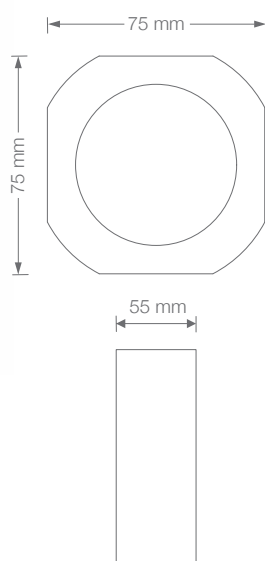

Robo Light

Features

Die cast aluminium housing
Black powder coated
Warm white
140 V - 270 V AC
IP54

Product Code

LWWL05S401XW

Wattage

4 x 1 W

MRP: 1,100



Consumer Lights


Reflect your story to the world and let your spaces shine at their best with the right lighting solutions from Jaquar Lighting.

Choose from an array of options in varied sizes, shapes, and budgets, and enhance the indoor and outdoor spaces that will uplift the ambience invariably.

Our range of lighting includes: Smart Lights

- Downlights
- Spot Lights
- Battens
- Lamps
- Strip Lights
- Street Lights

BENEFITS:

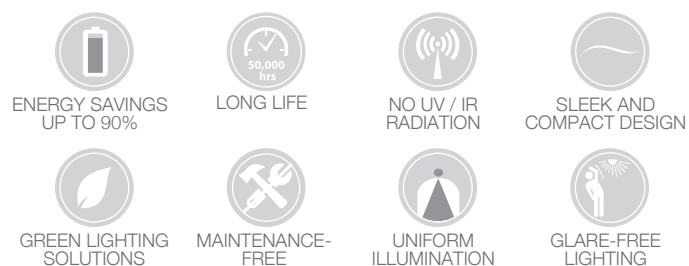

Lucent

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LLCN01R003XC	3	6500	Ø 70	Ø 82 x 17	525
LLCN01R003XN	3	4000	Ø 70	Ø 82 x 17	525
LLCN01R003XW	3	3000	Ø 70	Ø 82 x 17	525
LLCN01R006XC	6	6500	Ø 105	Ø 116 x 17	615
LLCN01R006XN	6	4000	Ø 105	Ø 116 x 17	615
LLCN01R006XW	6	3000	Ø 105	Ø 116 x 17	615
LLCN01R009XC	9	6500	Ø 105	Ø 116 x 17	785
LLCN01R009XN	9	4000	Ø 105	Ø 116 x 17	785
LLCN01R009XW	9	3000	Ø 105	Ø 116 x 17	785
LLCN01R012XC	12	6500	Ø 132	Ø 144 x 17	870
LLCN01R012XN	12	4000	Ø 132	Ø 144 x 17	870
LLCN01R012XW	12	3000	Ø 132	Ø 144 x 17	870
LLCN01R015XC	15	6500	Ø 155	Ø 166 x 17	1,030
LLCN01R015XN	15	4000	Ø 155	Ø 166 x 17	1,030
LLCN01R015XW	15	3000	Ø 155	Ø 166 x 17	1,030
LLCN01R018XC	18	6500	Ø 155	Ø 166 x 17	1,170
LLCN01R018XN	18	4000	Ø 155	Ø 166 x 17	1,170
LLCN01R018XW	18	3000	Ø 155	Ø 166 x 17	1,170
LLCN01R022XC	22	6500	Ø 175	Ø 184 x 17	1,290
LLCN01R022XN	22	4000	Ø 175	Ø 184 x 17	1,290
LLCN01R022XW	22	3000	Ø 175	Ø 184 x 17	1,290



Long life



CRI > 80



Beam angle
> 120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >55 Lm/W for 6 W, >120 Lm/W for 22 W
- Power factor: >0.90
- Housing material: Aluminum housing



Long life



CRI > 75



Beam angle
> 120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.95
- Housing material: Die cast aluminium

Lumax Plus

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (L X W X H)	MRP
LLMP01S003XC	3	CW	74 x 74	85 x 85 x 20	425
LLMP01S003XN	3	NW	74 x 74	85 x 85 x 20	425
LLMP01S003XW	3	WW	74 x 74	85 x 85 x 20	425
LLMP01S006XC	6	CW	105 x 105	121 x 121 x 20	690
LLMP01S006XN	6	NW	105 x 105	121 x 121 x 20	690
LLMP01S006XW	6	WW	105 x 105	121 x 121 x 20	690
LLMP01S012XC	12	CW	155 x 155	171 x 171 x 20	870
LLMP01S012XN	12	NW	155 x 155	171 x 171 x 20	870
LLMP01S012XW	12	WW	155 x 155	171 x 171 x 20	870
LLMP01S015XC	15	CW	155 x 155	171 x 171 x 20	1,080
LLMP01S015XN	15	NW	155 x 155	171 x 171 x 20	1,080
LLMP01S015XW	15	WW	155 x 155	171 x 171 x 20	1,080
LLMP01S018XC	18	CW	175 x 175	190 x 190 x 20	1,070
LLMP01S018XN	18	NW	175 x 175	190 x 190 x 20	1,070
LLMP01S018XW	18	WW	175 x 175	190 x 190 x 20	1,070
LLMP01S022XC	22	CW	206 x 206	225 x 225 x 20	1,200
LLMP01S022XN	22	NW	206 x 206	225 x 225 x 20	1,200
LLMP01S022XW	22	WW	206 x 206	225 x 225 x 20	1,200

Strella HD

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (L X W X H / DXH)	MRP
LSTA4KVR05XC	5	CW	Ø 70	Ø 80 x 35	260
LSTA4KVR05XN	5	NW	Ø 70	Ø 80 x 35	260
LSTA4KVR05XW	5	VW	Ø 70	Ø 80 x 35	260
LSTA4KVS08XC	8	CW	105 x 105	116 x 116 x 35	500
LSTA4KVS08XN	8	NW	105 x 105	116 x 116 x 35	500
LSTA4KVS08XW	8	VW	105 x 105	116 x 116 x 35	500
LSTA4KVR08XC	8	CW	Ø 105	Ø 116 x 35	500
LSTA4KVR08XN	8	NW	Ø 105	Ø 116 x 35	500
LSTA4KVR08XW	8	VW	Ø 105	Ø 116 x 35	500
LSTA4KVS12XC	12	CW	125 x 125	132 x 132 x 35	590
LSTA4KVS12XN	12	NW	125 x 125	132 x 132 x 35	590
LSTA4KVS12XW	12	VW	125 x 125	132 x 132 x 35	590
LSTA4KVR12XC	12	CW	Ø 155	Ø 162 x 35	590
LSTA4KVR12XN	12	NW	Ø 155	Ø 162 x 35	590
LSTA4KVR12XW	12	VW	Ø 155	Ø 162 x 35	590
LSTA01S015XC	15	CW	155 x 155	162 x 162 x 35	700
LSTA01S015XN	15	NW	155 x 155	162 x 162 x 35	700
LSTA01S015XW	15	VW	155 x 155	162 x 162 x 35	700
LSTA01R015XC	15	CW	Ø 155	Ø 162 x 35	700
LSTA01R015XN	15	NW	Ø 155	Ø 162 x 35	700
LSTA01R015XW	15	VW	Ø 155	Ø 162 x 35	700
LSTA01S022XC	22	CW	205 x 205	220 x 220 x 35	1,150
LSTA01S022XN	22	NW	205 x 205	220 x 220 x 35	1,150
LSTA01S022XW	22	VW	205 x 205	220 x 220 x 35	1,150
LSTA01R022XC	22	CW	Ø 205	Ø 220 x 35	1,150
LSTA01R022XN	22	NW	Ø 205	Ø 220 x 35	1,150
LSTA01R022XW	22	VW	Ø 205	Ø 220 x 35	1,150



Long life



CRI > 80



Beam angle
> 120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: > 90 Lm/W
- Power factor: > 0.95
- Housing material: Thermally conductive polycarbonate



Strella Accessories

Item Code	Wattage (W)	Dimension in MM (L X W X H / DXH)	MRP
LSTA01SMS008	8	105 x 105	190
LSTA01SMR008	8	Ø 105	190
LSTA01SMS015	15	155 x 155	200
LSTA01SMR015	15	Ø 155	200
LSTA01SMS022	22	205 x 205	270
LSTA01SMR022	22	Ø 205	270

2-in-1
Microwave Sensor




Microwave Sensor

Item Code	Cutout (MM)	Dimension in MM (D)	MRP
MOTSENMW2IN1	Ø 93	Ø 93	1,255

Technical data:

- Input voltage: 220 to 240 V AC
- Input frequency: 50/60 Hz
- Wiring input: 2 Wire/single phase
- Power consumption: < 1W
- Power on delay: 0-5 sec
- Size diameter (mm): 93 mm +/- 2 mm
- Type of mounting: Surface/recessed
- Hold time: 10 sec - 15 min (Adjustable)
- Detection distance: 6 meter
- HF System: 5.8 GHz




Volga Prime Smart

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LVOLPS2R18SC	18	CW	280 x 70	4,225
LVOLPS2R18SN	18	NW	280 x 70	4,225
LVOLPS2R18SW	18	WW	280 x 70	4,225

Technical data:

- Input voltage range: 220 V - 240 V AC
- Luminous efficacy: 55 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate
- Dazzle free soft light & no dark patches
- IP65- Protected against dust & splashing water
- PC diffuser - Uniform distribution of light





BATTERY BACKUP

Technical data:

- Housing material: Thermally conductive polycarbonate
- Easy & safe installation
- Dazzle free soft light & no dark patches
- AC/DC Downlight - Perfect for power cuts and emergency situations

KRIZA EMERGENCY DOWNLIGHT

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
KRZ01DLR15SC	15	6500	Ø 146 x48	1,400

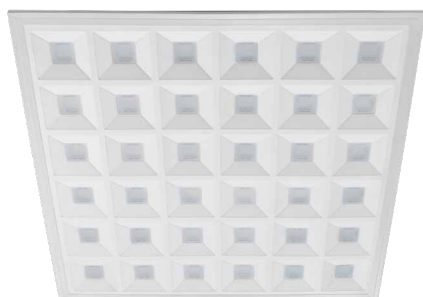

Scintillo

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LSNL01S045XC	45	6500	580 x 580	595 x 595 x 20	2,830
LSNL01S045XN	45	6500	580 x 580	595 x 595 x 20	2,830
LSNL01S045XW	45	6500	580 x 580	595 x 595 x 20	2,830

Technical data:

- Input voltage range: 100 V - 300 V AC
- High efficacy: 100 Lm/W
- Power factor: >0.9
- THD: <10%
- Housing material: CRCA white powder coated housing
- PC Lens & PS Diffuser: Uniform distribution of light

*2/3/5 year warranty applicable on all lighting products



Long life



CRI>80



Beam angle
>120°

Skylite

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
LSKL01S036XC	36	CW	595 x 595 x 36	2,260
LSKL01S036XN	36	NW	595 x 595 x 36	2,260
LSKL01S036XW	36	WW	595 x 595 x 36	2,260

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >105 Lm/W
- Power factor: >0.95
- Housing material: CRCA



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >70 Lm/W for 3 W, >80 Lm/W for 6 W, >90 Lm/W for 15 W
- Power factor: >0.9
- Housing material: Thermally conductive polycarbonate
- Suitable for junction box fitment

Pearl Plus

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LPPS01R003XC	3	CW	Ø 45	Ø 80 x 45	185
LPPS01R003XN	3	NW	Ø 45	Ø 80 x 45	185
LPPS01R003XW	3	WW	Ø 45	Ø 80 x 45	185
LPPS01R003XR	3	RED	Ø 45	Ø 80 x 45	185
LPPS01R003XG	3	GREEN	Ø 45	Ø 80 x 45	185
LPPS01R003XB	3	BLUE	Ø 45	Ø 80 x 45	185
LPPS01R003XP	3	PINK	Ø 45	Ø 80 x 45	185
LPPS01R003XV	3	VIOLET / PURPLE	Ø 45	Ø 80 x 45	185
LPPS02R006XC	6	CW	Ø 45	Ø 80 x 45	325
LPPS02R006XN	6	NW	Ø 45	Ø 80 x 45	325
LPPS02R006XW	6	WW	Ø 45	Ø 80 x 45	325
LPPS02R006XR	6	RED	Ø 45	Ø 80 x 45	325
LPPS02R006XG	6	GREEN	Ø 45	Ø 80 x 45	325
LPPS02R006XB	6	BLUE	Ø 45	Ø 80 x 45	325
LPPS02R006XP	6	PINK	Ø 45	Ø 80 x 45	325
LPPS02R006XV	6	VIOLET / PURPLE	Ø 45	Ø 80 x 45	325
LPPS01R015XC	15	CW	Ø 45	Ø 80 x 45	685
LPPS01R015XN	15	NW	Ø 45	Ø 140 x 65	685
LPPS01R015XW	15	WW	Ø 45	Ø 140 x 65	685
LPPS01R015XR	15	RED	Ø 45	Ø 140 x 65	685
LPPS01R015XG	15	GREEN	Ø 45	Ø 140 x 65	685
LPPS01R015XB	15	BLUE	Ø 45	Ø 140 x 65	685
LPPS01R015XP	15	PINK	Ø 45	Ø 140 x 65	685
LPPS01R015XV	15	VIOLET / PURPLE	Ø 45	Ø 140 x 65	685



Striker

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH / L X W X H)	MRP
LSTK01R006XC	6	CW	Ø 83	Ø 108 x 62	250
LSTK01R006XN	6	NW	Ø 83	Ø 108 x 62	250
LSTK01R006XW	6	WW	Ø 83	Ø 108 x 62	250
LSTK01R006XR	6	RED	Ø 83	Ø 108 x 62	250
LSTK01R006XG	6	GREEN	Ø 83	Ø 108 x 62	250
LSTK01R006XB	6	BLUE	Ø 83	Ø 108 x 62	250
LSTK01R006XP	6	PINK	Ø 83	Ø 108 x 62	250
LSTK01R006XV	6	VIOLET / PURPLE	Ø 83	Ø 108 x 62	250
LSTK01R008XC	8	6500	Ø 77	Ø 111 x 49	300
LSTK01R008XN	8	4000	Ø 77	Ø 111 x 49	300
LSTK01R008XW	8	3000	Ø 77	Ø 111 x 49	300



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate with aluminium heat sink
- Suitable for junction box fitment



Long life



CRI>80



Beam angle
>26°

Technical data:

- Input voltage range: 220-240 V AC
- Luminous efficacy: >70 Lm/W
- Power factor: >0.90
- Housing material: Die cast aluminium housing with black powder coating

Eris Surface Round

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LERSBRGR05SC	5	CW	Ø 53	Ø 53 x 70	875
LERSBRGR05SN	5	NW	Ø 53	Ø 53 x 70	875
LERSBRGR05SW	5	WW	Ø 53	Ø 53 x 70	875
LERSBRGR10SC	10	CW	Ø 72	Ø 72 x 90	1,100
LERSBRGR10SN	10	NW	Ø 72	Ø 72 x 90	1,100
LERSBRGR10SW	10	WW	Ø 72	Ø 72 x 90	1,100
LERSBRGR15SC	15	CW	Ø 95	Ø 95 x 95	1,775
LERSBRGR15SN	15	NW	Ø 95	Ø 95 x 95	1,775
LERSBRGR15SW	15	WW	Ø 95	Ø 95 x 95	1,775



Gem Blaze

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LGEMB01R03XC	3	6500	Ø 55.5	Ø 74.5 x 42	250
LGEMB01R03XN	3	4000	Ø 55.5	Ø 74.5 x 42	250
LGEMB01R03XW	3	3000	Ø 55.5	Ø 74.5 x 42	250
LGEMB01R06XC	6	6500	Ø 67.5	Ø 94.5 x 46	325
LGEMB01R06XN	6	4000	Ø 67.5	Ø 94.5 x 46	325
LGEMB01R06XW	6	3000	Ø 67.5	Ø 94.5 x 46	325
LGEMB01R09XC	9	6500	Ø 87	Ø 116 x 53	400
LGEMB01R09XN	9	4000	Ø 87	Ø 116 x 53	400
LGEMB01R09XW	9	3000	Ø87	Ø 116 x 53	400



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 220-240 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Polycarbonate body with aluminum heat sink & lens



Gem Star

Technical data:

- Surge protection upto 4KV
- Sustain voltage upto 400V
- Input voltage range: 220-240 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.90
- CRI: >80
- Polycarbonate housing

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LGEMS01R03XC	3	6500	Ø 60	70 x 35	250
LGEMS01R03XN	3	4000	Ø 60	70 x 35	250
LGEMS01R03XW	3	3000	Ø 60	70 x 35	250



Gem Surface

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LGEM01R006SC	6	6500	Ø90	90 x 27	315
LGEM01R006SW	6	4000	Ø90	90 x 27	315
LGEM01R006SN	6	3000	Ø90	90 x 27	315
LGEM01R012SC	12	6500	Ø121	121 x 27	450
LGEM01R012SW	12	4000	Ø121	121 x 27	450
LGEM01R012SN	12	3000	Ø121	121 x 27	450
LGEM01R018SC	18	6500	Ø156	156 x 27	675
LGEM01R018SW	18	4000	Ø156	156 x 27	675
LGEM01R018SN	18	3000	Ø156	156 x 27	675



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 100 V - 230 V AC
- Luminous efficacy: For 6 & 12 W (65 Lm/W)
For 18 W (60 Lm/W)
- Power factor: >0.9
- Housing material: PC body & diffuser with metal mounting plate



Gem Plus

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LGMP01R005XC	5	CW	Ø 70	Ø 85 x 55	685
LGMP01R005XN	5	NW	Ø 70	Ø 85 x 55	685
LGMP01R005XW	5	WW	Ø 70	Ø 85 x 55	685
LGMP01R010XC	10	CW	Ø 70	Ø 85 x 70	1,030
LGMP01R010XN	10	NW	Ø 70	Ø 85 x 70	1,030
LGMP01R010XW	10	WW	Ø 70	Ø 85 x 70	1,030
LGMP01R015XC	15	CW	Ø 90	Ø 110 x 85	1,660
LGMP01R015XN	15	NW	Ø 90	Ø 110 x 85	1,660
LGMP01R015XW	15	WW	Ø 90	Ø 110 x 85	1,660
LGMP01R020XC	20	CW	Ø 110	Ø 140 x 95	2,050
LGMP01R020XN	20	NW	Ø 110	Ø 140 x 95	2,050
LGMP01R020XW	20	WW	Ø 110	Ø 140 x 95	2,050



Long life



CRI>80



Beam angle
>40°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Die cast aluminium



Long life



CRI>70



Beam angle
>30°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >50 Lm/W
- Housing material: Thermally conductive polycarbonate

Jasper Prime

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LJPM01R002XC	2	CW	Ø 35	Ø 43 x 105	135
LJPM01R002XG	2	GW	Ø 35	Ø 43 x 105	135
LJPM01R002XW	2	WW	Ø 35	Ø 43 x 105	135
LJPM01R002XR	2	RW	Ø 35	Ø 43 x 105	135
LJPM01R002XB	2	BW	Ø 35	Ø 43 x 105	135



Long life



CRI>80



Beam angle
>120° for 35 W
>180° for 25 W



117 Lm/W
for 35 W
130 Lm/W
for 25 W

Technical data:

- Input voltage range: 100 V - 300 V AC
- Power factor: >0.95
- Housing material: Extruded aluminium

Kubik Ultra

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
LKBU4KVS22XC	22	CW	1135 x 31 x 40	605
LGLZU1X025XC	25	CW	1135 x 31 x 40	700
LKBU4KVS35XC	35	CW	1135 x 22 x 37	800



Long life



CRI>80



Beam angle
>120°



100 Lm/W
for 6 W - 20 W

Technical data:

- Input voltage range: 100 V - 300 V AC
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate



Kubik Plus

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LKBP01S006XC	6	CW	300 x 22 x 37	295
LKBP01S006XN	6	NW	300 x 22 x 37	295
LKBP01S006XW	6	WW	300 x 22 x 37	295
LKBP4KV010XC	10	CW	575 x 22 x 37	315
LKBP4KV010XN	10	NW	575 x 22 x 37	315
LKBP4KV010XW	10	WW	575 x 22 x 37	315
LKBP4KV020XC	20	CW	1090 x 22 x 37	350
LKBP4KV020XN	20	NW	1090 x 22 x 37	350
LKBP4KV020XW	20	WW	1090 x 22 x 37	350



BATTERY BACKUP



Long life



CRI>80



Beam angle
>120°

KRIZA INVERTER BATTEN

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
LKRZ01BAT20C	20	CW	1135 x 22 x 37	965
LKRZ01BAT20N	20	NW	1135 x 22 x 37	965
LKRZ01BAT20W	20	VW	1135 x 22 x 37	965

Technical data:

- Operating voltage: 100-300 V AC, 50 Hz
- Colour temperature: 3000-6500K
- IP rating: 20
- Operating temperature: -10° C to 50°C
- Battery: Li-ION battery
- Battery capacity: 2200 mAh
- Charging time: 9 hours
- Overcharge protection: Yes
- Cycle lifetime of battery: 300 times (Completely charged and discharged)



BATTERY BACKUP

KRIZA EMERGENCY BULB

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LKRZ009B22CW	9	6500	Ø 70 x 146	580



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 100 - 300 V AC
- Luminous efficacy: >80 Lm/W @ Normal Supply
- Power factor: >0.95
- Charging time: Minimum 6 Hours
- Housing materials: Thermally conductive polycarbonate



Illuminator

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LILM030B22CW	B22	30	CW	Ø 100 x 180	615
LILM040B22CW	B22	40	CW	Ø 115 x 198	935
LILM050B22CW	B22	50	CW	Ø 125 x 220	1,110



SURGE PROTECTION
UPTO 4KV



SUSTAIN VOLTAGE
UPTO 440V



25,000 hrs
Long life



CRI>80



Wide beam angle
>180°

- Technical data:**
- Input voltage range: 100 V - 300 V AC
 - Luminous efficacy: 100 Lm/W
 - Power factor: >0.95
 - Housing material: Die cast aluminium



SURGE PROTECTION
UPTO 4KV



SUSTAIN VOLTAGE
UPTO 440V



25,000 hrs
Long life



CRI>80



Beam angle
>140°

- Technical data:**
- Input voltage range: 100 V - 300 V AC
 - Luminous efficacy: 105 Lm/W
 - Power factor: >0.95
 - Housing material: Overmoulded PC



Spark HD

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LSAK4KV05B2C	B22	5	CW	Ø 57 x 100	140
LSAK4KV07B2C	B22	7	CW	Ø 57 x 100	135
LSAK4KV09B2C	B22	9	CW	Ø 57 x 102	135



Technical data:

- Full globe diffuser for wide distribution of light
- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: 105 Lm/W
- Power factor: >0.95
- Housing material: Overmoulded PC

Prima HD

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LPRM4KV03B2C	B22	3	CW	Ø 50 x 92	120
LPRM4KV03B2W	B22	3	WW	Ø 50 x 92	120
LPRM4KV03E2C	E27	3	CW	Ø 50 x 92	120
LPRM4KV03E2W	E27	3	WW	Ø 50 x 92	120
LPRM4KV05B2C	B22	5	CW	Ø 60 x 112	165
LPRM4KV05B2W	B22	5	WW	Ø 60 x 112	165
LPRM4KV05E2C	E27	5	CW	Ø 60 x 112	165
LPRM4KV05E2W	E27	5	WW	Ø 60 x 112	165
LPRM4KV07B2C	B22	7	CW	Ø 60 x 112	165
LPRM4KV07B2W	B22	7	WW	Ø 60 x 112	165
LPRM4KV07E2C	E27	7	CW	Ø 60 x 112	165
LPRM4KV07E2W	E27	7	WW	Ø 60 x 112	165
LPRM5KV09B2C	B22	9	CW	Ø 60 x 112	175
LPRM5KV09B2W	B22	9	WW	Ø 60 x 112	175
LPRM5KV09E2C	E27	9	CW	Ø 60 x 112	175
LPRM5KV09E2W	E27	9	WW	Ø 60 x 112	175
LPRM012B22CW	B22	12	CW	Ø 65 x 118	255
LPRM012B22WW	B22	12	WW	Ø 65 x 118	255
LPRM012E27CW	E27	12	CW	Ø 65 x 118	255
LPRM012E27WW	E27	12	WW	Ø 65 x 118	255
LPRM4KV14B2C	B22	14	CW	Ø 65 x 126	285
LPRM4KV14B2W	B22	14	WW	Ø 65 x 126	285
LPRM4KV14E2C	E27	14	CW	Ø 65 x 126	285
LPRM4KV14E2W	E27	14	WW	Ø 65 x 126	285
LPRM4KV20B2C	B22	20	CW	Ø 80 x 152	380
LPRM4KV20B2W	B22	20	WW	Ø 80 x 152	380
LPRM4KV20E2C	E27	20	CW	Ø 80 x 152	380
LPRM4KV20E2W	E27	20	WW	Ø 80 x 152	380



Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >40 Lm/W
- Housing material: Polycarbonate

Night Lamps (0.5 W)

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
LPRM01R001XC	B22	0.5	CW	Ø 45 x 70	58
LPRM01R001XY	B22	0.5	YELLOW	Ø 45 x 70	58
LPRM01R001XR	B22	0.5	RED	Ø 45 x 70	58
LPRM01R001XG	B22	0.5	GREEN	Ø 45 x 70	58
LPRM01R001XB	B22	0.5	BLUE	Ø 45 x 70	58
LPRM01R001XO	B22	0.5	ORANGE	Ø 45 x 70	58
LPRM01R001XP	B22	0.5	PINK	Ø 45 x 70	58

Janus

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
LJNS02S012XC	24	CW	8 x 2.25	895
LJNS02S012XN	24	NW	8 x 2.25	895
LJNS02S012XW	24	WW	8 x 2.25	895
LJNS02S012XR	24	Red	8 x 2.25	895
LJNS02S012XG	24	Green	8 x 2.25	895
LJNS02S012XB	24	Blue	8 x 2.25	895
LJNS01S012XC	24	CW	8 x 2.25	895
LJNS01S012XN	24	NW	8 x 2.25	895
LJNS01S012XW	24	WW	8 x 2.25	895

Technical data:

- Input voltage range: 12 V DC (with adapter)
- Luminous efficacy: >90 Lm / W
- Roll: 5 meter with cut points
- No. of LEDs: 60 LEDs / meter



Strip Driver

Item Code	Voltage (V)	Current (A)	MRP
LSTD02A012V	12 DC	2	585



Product specifications:

- Options: 60 LED/meter & 120 LED/meter
- Length: 45 meter/roll
- CRI: ≥80
- Available Colours: CW / WW / Red / Green Blue / Ice Blue / Amber



Technical data:

- Easy to install
- IP65 LED Rope Light
- Long lasting and bright light to make your home, factory, and office bright and stylish
- Can be used in POP Cove
- Rated input voltage-220-240 V AC
- Dazzle-free soft light
- Very easy to decorate patterns, designs and characters
- Low power consumption, safe and reliable

Rope Light

Item Code	Wattage (W)	CCT (K)	Dimension	MRP
LJNP01S060XC	60	CW	45m/Roll	6,650
LJNP01S060XW	60	WW	45m/Roll	6,650
LJNP01S060XR	60	RED	45m/Roll	6,650
LJNP01S060XG	60	GREEN	45m/Roll	6,650
LJNP01S060XB	60	BLUE	45m/Roll	6,650
LJNP01S060XI	60	ICE BLUE	45m/Roll	6,650
LJNP01S060XA	60	AMBER	45m/Roll	6,650
LJNP01S120XC	120	CW	45m/Roll	8,450
LJNP01S120XW	120	WW	45m/Roll	8,450
LJNP01S120XR	120	RED	45m/Roll	8,450
LJNP01S120XG	120	GREEN	45m/Roll	8,450
LJNP01S120XB	120	BLUE	45m/Roll	8,450
LJNP01S120XI	120	ICE BLUE	45m/Roll	8,450
LJNP01S120XA	120	AMBER	45m/Roll	8,450
LJPMACD01S45				325

*2/3/5 year warranty applicable on all lighting products



Hummer

Item Code	Wattage (W)	CCT (K)	Pole Mounting Dimensions (MM)	Dimension in (MM)	MRP
LHMR01SL020C	20	CW	CW	320 x 75 x 60	1,630
LHMR01SL030C	30	CW	CW	320 x 75 x 60	2,540



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >100 Lm / W
- THD: <10%
- IP65
- Housing material: Die cast aluminium



Long life



CRI>80



Beam angle
>120°

Technical data:

- Input voltage range: 220 to 240 V AC
- Battery voltage: 3.7V Li-ION
- Battery capacity: 2600 mAh
- Luminous flux on AC mode: 1800 Lm
- Luminous flux on battery mode: 500 Lm
- Power factor: >0.95
- Full battery charging time: 9 Hours
- IP66



BATTERY BACKUP

KRIZA EMERGENCY STREET LIGHT

Item Code	Wattage (W)	CCT (K)	Pole Mounting Dimensions (MM)	Dimension in (MM)	MRP
LKRZ01SL018C	18	CW	40 (Tol.±5)	355 x 105 x 75	1,950



PCR

Item Code	Wattage (W)	CCT (K)	Pole Mounting Dimensions (MM)	Dimension in (MM)	MRP
LPCRSRT25WXC	25	CW	Ø 42	330 x 117 x 67	1,690



Long life



CRI>70



Beam angle
>120°

Technical data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >100 Lm / W
- THD: <10%
- IP66
- Housing material: Die cast aluminium





SURGE PROTECTION
UPTO 4KV

SUSTAIN VOLTAGE
UPTO 360V





Long life



CRI>80



Beam angle
>120°

Street Light

Item Code	Wattage (W)	CCT (K)	Pole Mounting Dimensions (MM)	Dimension in (MM)	MRP
LSRT01F025XC	25	CW	Ø 42	325 x 145 x 65	1,690

- Technical data:**
- Input voltage range: 100 V - 300 V AC
 - Luminous efficacy: >100 Lm / W
 - THD: <10%
 - IP65
 - Housing material: Die cast aluminium



SURGE PROTECTION
UPTO 10KV

SUSTAIN VOLTAGE
UPTO 440V





Long life



CRI>80



Beam angle
>60°



Faro

- Technical data:**
- Operating voltage range: 140 - 270V
 - Luminous efficacy: >100 Lm/W
 - Power factor: ≥0.95
 - THD: <10%
 - IP66
 - Lens: PMMA lens for proper distribution of light
 - No harmful UV & IR radiations
 - Housing material: Die cast aluminum housing for superior heat dissipation

Item Code	Wattage (W)	CCT (K)	Dimension in (MM)	MRP
LFRO01S030XC	30	CW	198 x 188 x 36	2,210
LFRO01S030XN	30	NW	198 x 188 x 36	2,210
LFRO01S030XW	30	WW	198 x 188 x 36	2,210
LFRO01S050XC	50	CW	238 x 228 x 36	2,980
LFRO01S050XN	50	NW	238 x 228 x 36	2,980
LFRO01S050XW	50	WW	238 x 228 x 36	2,980



Smart Luminaires

The world of devices is getting smarter and so are Jaquar Lighting products.

For your daily lighting requirements, our in-house R&D has come up with several next-generation products.

From a bulb which can be operated using Bluetooth and Wi-Fi, to an emergency bulb with an in-built battery to stay lit during power cuts, and motion-sensing battens, downlights and panels which get switched on automatically as you approach.

All these products are designed to need minimal human touch to allow better hygiene, as well as provide ease of operation and save time, effort and energy.



VIVID



Bluetooth & Wi-fi Enabled
(Supported Devices: Android & iOS)

-  Single app can control 200 bulbs within Wi-Fi/ bluetooth range
-  Compatible with bluetooth version 4.0 and above
-  Can smoothly work up to 10 meter
-  3 million+ color options
-  Brightness adjustable from 100% to 0%
-  Create different groups to work together
-  Wireless Connection through Wi-Fi
-  Wi-Fi products compatible with Amazon Alexa/ Google Home
-  Suitable for decorative purposes
-  High efficiency

Vivid (Bluetooth) & (Wi-Fi)

Product Code	Power (W)	Color	Dimension in MM (DXH)	MRP
LVVD07B22RGB	7	RGB / CW	Φ 65 x 126	1,070
LVDWF07B2RGB	7	RGB / CW	Φ 65 x 120	1,620

Technical & Commercial Data:

- Input voltage range: 100 - 300 V AC
- Luminous efficacy: >80 Lm/W @6500K
- Power factor: >0.95
- Housing materials: Thermally conductive polycarbonate

*2/3/5 year warranty applicable on all lighting products





Strella Tri-color

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
LSTA3IN1R15X	15	CW/ NW/ WW	Φ 155	Φ 162 x 35	1,000



Long life



CRI>80



Beam angle
>120°



*3-in-1
color option
CW-NW-WW

Technical & Commercial Data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >100 Lm/W @6500K
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate

*2/3/5 year warranty applicable on all lighting products



The light turns on in the presence of motion and will turn off after 2 minutes if no motion is detected



Strella **SMART** /// SQUARE / ROUND

Motion sensor based downlights

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (LXWXH / DXH)	MRP
LSTS01S008XC	8	CW	105 x 105	116 x 116 x 35	1,000
LSTS01S015XC	15	CW	155 x 155	162 x 162 x 35	1,450
LSTS01S022XC	22	CW	205 x 205	220 x 220 x 35	1,840
LSTS01S015XW	15	WW	155 x 155	162 x 162 x 35	1,450
LSTS01S022XW	22	WW	205 x 205	220 x 220 x 35	1,840
LSTS01R008XC	8	CW	Φ 105	116 x 35	1,000
LSTS01R015XC	15	CW	Φ 155	165 x 35	1,450
LSTS01R022XC	22	CW	Φ 205	220 x 35	1,840
LSTS01R008XW	8	WW	Φ 105	116 x 35	1,000
LSTS01R015XW	15	WW	Φ 155	165 x 35	1,450
LSTS01R022XW	22	WW	Φ 205	220 x 35	1,840



Long life



CRI>80



Beam angle
>120°

Technical Data:

- Input voltage range: 110 - 300 V AC
- Luminous efficacy: >80 Lm/W for 8 W
>90 Lm/W for 15 W & 22 W
- Power factor: >0.95
- Sensor coverage range: 5-7 meters
- Mounting height: Maximum up to 5 meter
- Housing materials: Thermally conductive polycarbonate



Kubik **SMART** ///

Motion sensor based battens

Item Code	Wattage (W)	CCT (K)	Dimension in MM (LXWXH)	MRP
LKBS01S020XC	20	CW	1135 x 22 x 37	1,140



Long life



CRI>80



Beam angle
>120°

Technical Data:

- Input voltage range: 100 - 300 V AC
- Luminous efficacy: >100 Lm/W
- Power factor: >0.95
- Sensor coverage range: 5-7 metres
- Mounting height: Maximum up to 5 meter
- Housing materials: Thermally conductive polycarbonate





Starlite Alike (with remote)

SMART

Remote control operated batten with tunable colors & dimming

Item Code	Wattage (W)	CCT (K)	Dimension in MM (LXWXH)	MRP
LSRA01S020DM*	20	CW/ NW/ WW	1170 x 20 x 40	1,500



Long life



CRI>80



Beam angle
>120°



*3-in-1
color option
CW-NW-WW

BENEFITS:

- 80% energy saving
- Compact and sleek design
- 2000 lumen output
- Single batten with tunable colors & dimming

*Single remote can control 30 battens

Technical & Commercial Data:

- Input voltage range: 100 - 300 V AC
- Luminous efficacy: >100 Lm/W @6500K
- Power factor: >0.95
- Housing materials: Thermally conductive polycarbonate



*Remote control operation



*Dimmable
(100% - 20%)

Starlite

SMART

Single batten with tunable colours

Item Code	Wattage (W)	CCT (K)	Dimension in MM (LXWXH)	MRP
LSRE01S020X	20	CW/ NW/ WW	1170 x 20 x 40	730



Long life



CRI>80



Beam angle
>120°



*3-in-1
color option
CW-NW-WW


Changing tri-color from CW to NW to WW in manual switching

Technical & Commercial Data:

- Input voltage range: 100 V - 300 V AC
- Luminous efficacy: >100 Lm/W
- Power factor: >0.95
- Housing materials: Thermally conductive polycarbonate



*2/3/5 year warranty applicable on all lighting products

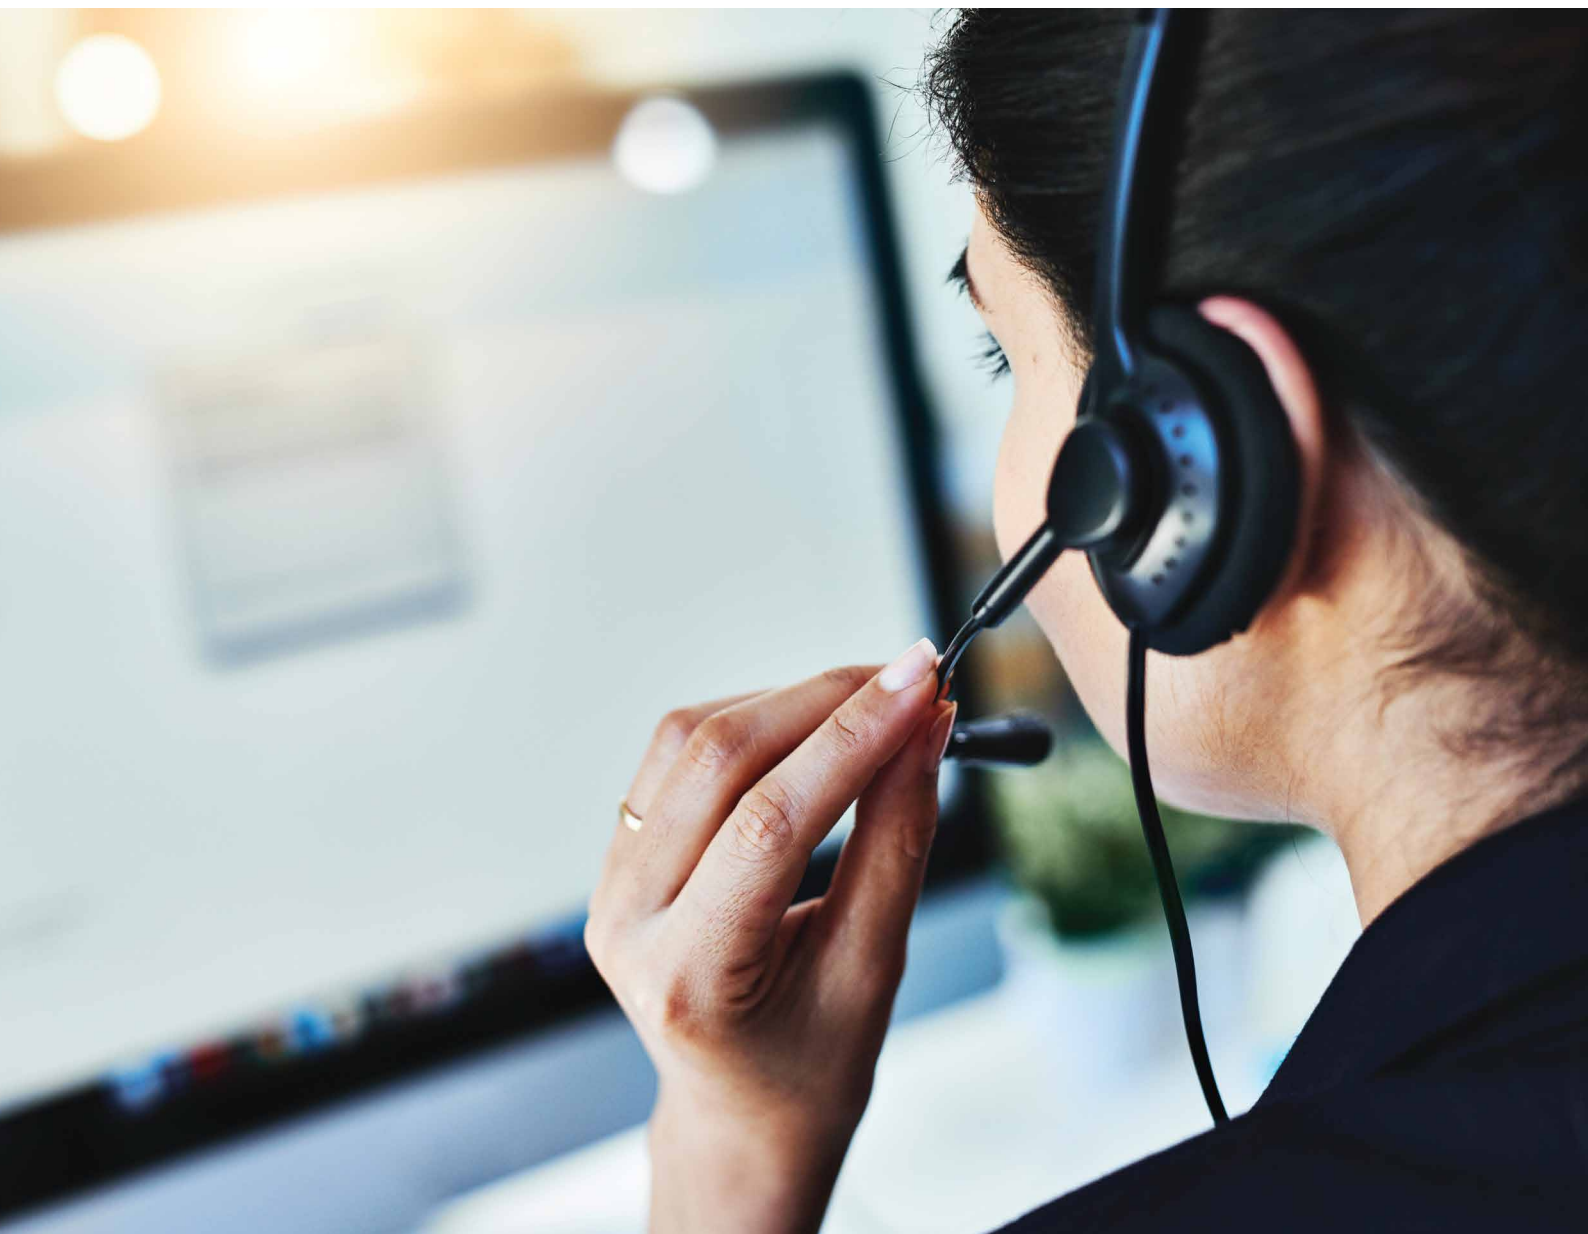

Pro-active customer care

Even peers vouch for Jaquar's enviable customer care.

Backed by over 1,000 trained technicians and a warranty on its products, Jaquar lighting provides India's most reliable service to its customers with a fully integrated service network across the country.

Toll-free customer care no: 1800 212 6808

E-mail: ccare.lighting@jaquar.com



 ***Global Headquarters***
Net Zero Energy Building spread over 48,000 sq. mtrs.

Conceived back in 1960, the Jaquar Group has been built on the platform of the highest quality standards, aesthetics and the intent of providing world-class products. Today, the Jaquar Group caters to luxury, premium and value bathroom segments with Artize, Jaquar & Essco brands, respectively, for residential and commercial sectors across the globe. The group's lighting division, Jaquar Lighting too, has been setting new parameters of excellence while witnessing unprecedented success.

Artize

It pays tribute to the fine traditions of exquisite craftsmanship and precision where design, technology and talent combine to deliver a masterpiece. Artize products are crafted for luxurious bath spaces. Perfect harmony is the very essence of Artize- together as coordinates or even as individual pieces. Artize's exquisite craftsmanship is so stunning that it can inspire the design principles of not just your bath spaces but of your entire living spaces.



A leading global super brand known for its excellence in innovation and technology. The highest build standards combine with the most beautifully designed aesthetics to provide world-class products for tough conditions. With a superb blend of ergonomic shapes, contemporary styles and meticulous finish, Jaquar continues to enthrall millions of hearts across the world with its wide range of concepts and products.



For over 6 decades, 'Essco' the bathroom brand has been the benchmark for the organised bath industry in India. Essco defines base quality standards in India. A great value-for-money bath brand, Essco pioneered the concept of branded bath fittings in India, and is today one of the most respected names in the market, fulfilling a common man's ambition of a better quality of life through true quality, better hygiene, affordable pricing, trusted customer service & a 10-year warranty promise.



CALL
PURCHASE ASSISTANCE
1800-120-332222
(Toll Free)

And we'll make it easy!

Speak to our Lighting Experts, who will suggest the right product that you should go in for and where to buy it from.